

Model 801X-VR/-VP Velocity Transmitter



4-20mA Loop Power
True RMS or Peak Output
-40°C to +85°C Operating Range
Top Exit Connector or Integral Cable




The Model 8011 & 8012 are internally shielded rugged 4-20mA velocity transmitters. The transmitters are available in ranges from 0.5 to 5.0 in/sec, in either RMS or Peak velocity output options. The model 8011 features a top exit MIL-C-5015 connector while the model 8012 features an integral cable. The units are hermetically sealed and are designed for operating in temperature ranges from -40°C to +85°C.

FEATURES


- 0.5 to 5.0 in/sec Dynamic Range
- 3-1000Hz Bandwidth
- Case Isolated, Internally Shielded
- Hermetically Sealed, Welded
- Annular Shear Mode
- Reverse Wiring Protection
- 2-Pin MIL-C-5015 Connector

APPLICATIONS

- General Purpose
- Machine Monitoring
- Industrial Applications
- Harsh Environments
- Gearbox Monitoring

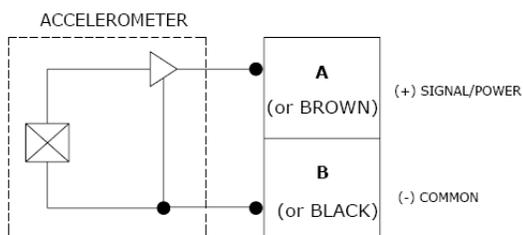

dimensions

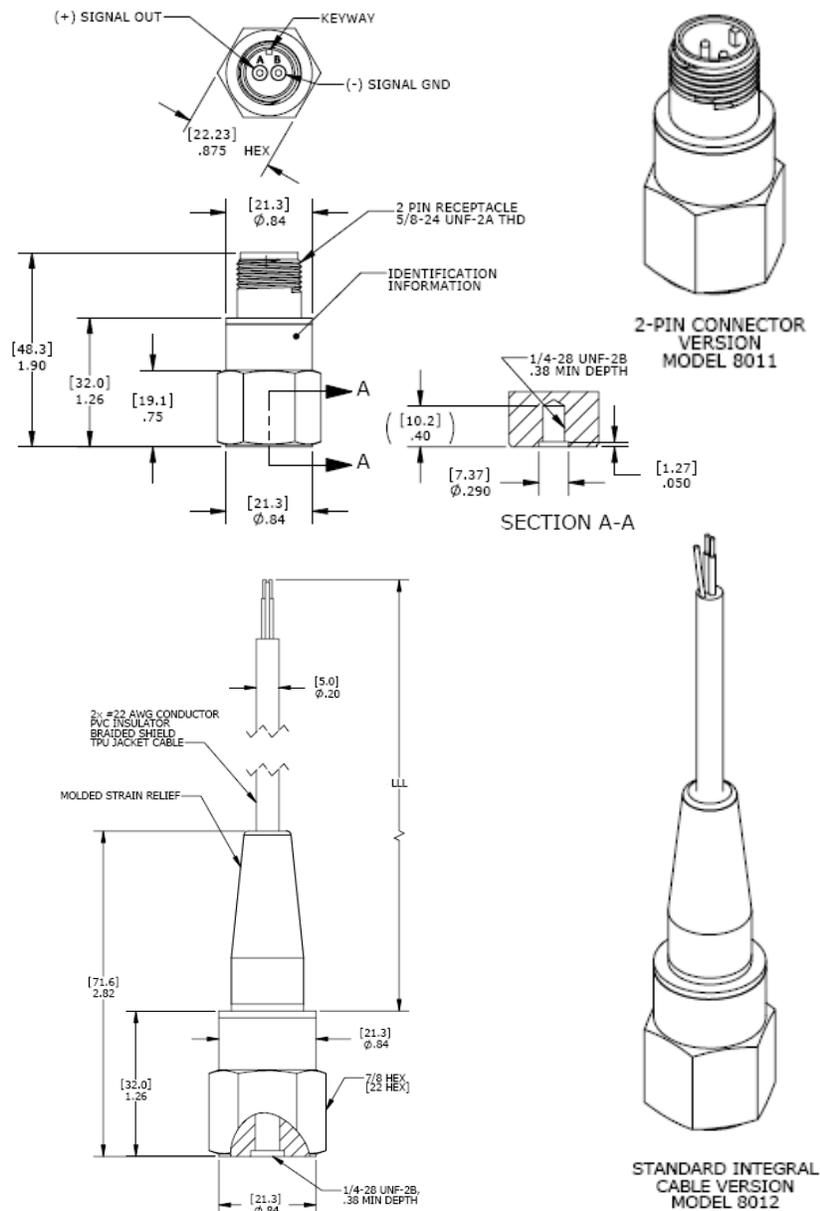

STANDARD INTEGRAL CABLE VERSION MODEL 8012

Model 801X-VR/-VP Velocity Transmitter

All values are typical at +24°C, 100Hz and 15Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1003 for Plug & Play AC Accelerometers.

Parameters						Notes
DYNAMIC						
Measurement Range (in/sec)	0-0.5	0-1.00	0-2.00	0-3.00	0-5.00	
Measurement Range (mm/sec)	0-12.7	0-25.4	0-50.8	0-76.2	0-127	
Output (mA)	4-20	4-20	4-20	4-20	4-20	
Frequency Response (cpm)	180-60000	180-60000	180-60000	180-60000	180-60000	±10%
Frequency Response (Hz)	3-1000	3-1000	3-1000	3-1000	3-1000	±10%
Non-Linearity (%FSO)	±1					
Transverse Sensitivity (%)	<5					
Shock Limit (g)	5000					
ELECTRICAL						
Excitation Voltage (Vdc)	12 to 30					
Loop Resistance (Ohms)	900 max					See Note 1
Turn on Time (sec)	<15					
Grounding	Case Isolated, Internally Shielded					
ENVIRONMENTAL						
Operating Temperature (°C)	-40 to +85					
Storage Temperature (°C)	-40 to +85					
PHYSICAL						
Sensing Element	Ceramic (shear mode)					
Case Material	Stainless Steel					
Weight (grams)	93					
Mounting Torque	24 lb-in (2.7 N-m)					
Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±10% Frequency Response Limit				
Supplied accessories:	AC-A03663	¼-28 to ¼-28 mounting stud				
Optional accessories:	316-XXX	Cable Assembly, Straight (XXX designates length in inches, 10ft standard)				
	318-XXX	Cable Assembly, 90 Degrees (XXX designates length in inches, 10ft standard)				
	AC-D03664	¼-28 to M5 mounting stud				
	AC-D03665	¼-28 to M6 mounting stud				
	AC-A04209	Magnetic Mounting Adaptor				
	AC-D04210	Adhesive Mounting Adaptor				

Note 1

Maximum Loop Resistance = (Excitation Voltage – 12Vdc) / 20mA

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际D座302
电话：+86 010 8477 5646
传真：+86 010 5894 9029
邮箱：sales@sensorway.cn
<http://www.sensorway.cn>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING

801X-ZZ-GG-CCC	-ZZ	-GG
Cable length (120 is 120 inches)	VR = RMS	05 = 0-0.5 in/sec (0-12.7 mm/sec)
Dynamic Range (05 is 0-0.5 in/sec)	VP = Peak	10 = 0-1.0 in/sec (0-25.4 mm/sec)
Range Type (VR is RMS Velocity)		20 = 0-2.0 in/sec (0-50.8 mm/sec)
Electrical Connection Option (1 for 2-pin connector, 2 for integral cable)		30 = 0-3.0 in/sec (0-76.2 mm/sec)
		50 = 0-5.0 in/sec (0-127 mm/sec)

Example: 8011-VR-10
Model 8011, 2-pin connector, RMS velocity output, 0-1.0 in/sec